

Typical Properties & Specification




Product Name	BrockFILL™
Product Description	Artificial turf infill made from engineered wood particles produced in the USA
Bulk Density	17 lb / cu. ft.
Packaging	45 cu. ft. supersacks (approx. 750 lb each) – 2 supersacks per pallet
Moisture Content	8 – 15% (at time of production)
Color	Natural to Medium Brown

Sieve Analysis (Typical Results)

ASTM C136, modified (Ro-Tap RX-29, 5 min shaking)

Sieve Size (mm)	Cumulative % Passing		
	Typical Value	Typical Range	Specification
3.35	100	99 – 100	> 99
2.36	95	90 – 100	> 90
2.00	84	75 – 98	-
1.70	70	60 – 90	-
1.40	49	35 – 70	-
1.18	31	20 – 50	-
1.00	15	5 – 35	-
0.71	2.1	0 – 6	< 6
0.5	0.3	0 – 2	< 2

Typical Particle Size Distribution Curve

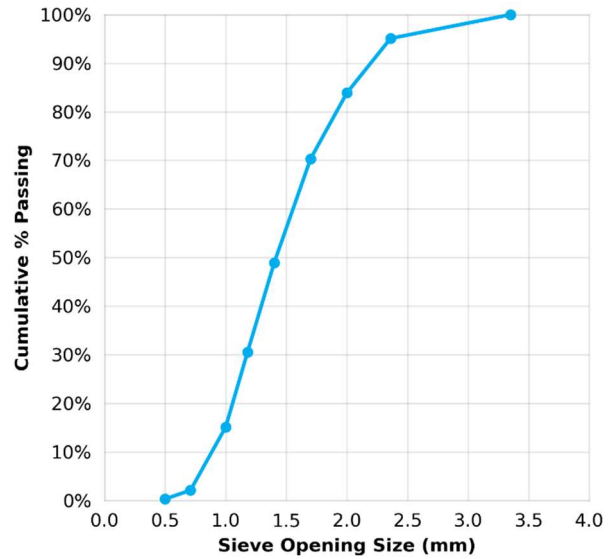

Environmental Compatibility Testing

Test	Method	Result
Pesticide Testing	AOAC Method 2007.01	PASS
Chlorinated Acidic Herbicides	FDA PAM II Method 180.292	PASS
Total CAM 17 Metals and Hexavalent Chromium	EPA Methods 3050B / 6020 EPA Methods 3060A / 7199	PASS
Leachable CAM 17 Metals and Hexavalent Chromium	EPA Methods 1312 / 6020 EPA Methods 1312 / 7199	PASS
Leachable Semi-Volatile Organic Compounds including Phenols	EPA Methods 1312 / 8270C	PASS

DATA ARE TYPICAL PROPERTIES ONLY. THIS DOCUMENT DOES NOT CREATE ANY WARRANTY, EXPRESS OR IMPLIED.

Test reports available upon request

Patents Pending